




## Model HT11D Overall Dimensions

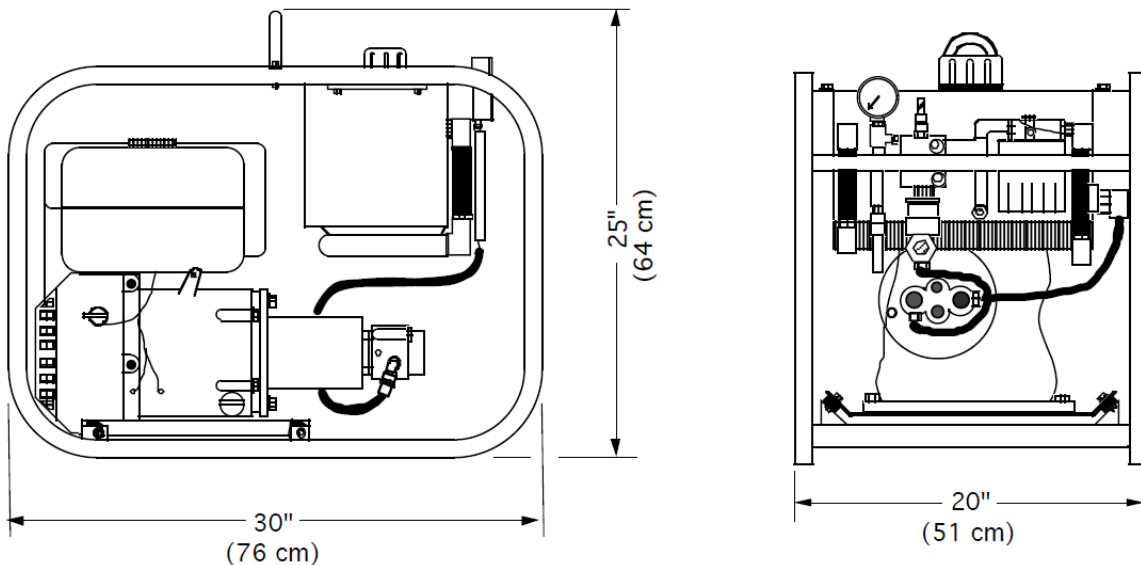

## SPECIFICATIONS

ENGINE:..... Honda GX390 Gasoline  
HORSE POWER:..... 13 @ 3500 RPM  
HYDRAULIC OUTPUT:..... Variable Max 6 GPM (23 LPM)  
OPERATING PRESSURE:..... Maximum 2100 PSI (143 Bar)  
HOSE PORT SIZE:..... 1/2" NPT  
HYDRAULIC OIL:..... SAE 10W or 20W Type AW  
also: Dexron ATF or Biodegradable oil  
OIL FILTRATION:..... 10 Micron (Standard)  
OIL RESERVOIR CAPACITY:..... 4 U.S. Gallons (15.1 Liters)  
FUEL TANK CAPACITY:..... 1.8 U.S. Gallons (6.8 Liters)  
FUEL CONSUMPTION:..... Approx. .9 U.S. Gal/Hr (3.4 Liters/Hr)  
DIMENSIONS:..... H 25" (63.5 cm) x W 20" (51 cm) x L 30" (76 cm)  
w/ Wheel Kit H: 28 3/4" (73 cm) x W 30 1/2" (78 cm) x L 41" (104 cm)

\* For Flows and Pressures Other Than Standard, Consult Factory

Since we are constantly working to improve our products, specifications are subject to change without notice.



167 Stock Street, Nesquehoning, PA 18240 Phone: 570-645-3779 Fax: 570-645-4061

Website: [www.hydra-tech.com](http://www.hydra-tech.com)

E-Mail: [htpump@hydra-tech.com](mailto:htpump@hydra-tech.com)