

# PORTABLE HYDRAULIC POWER UNIT MODEL HT13GXRE

This Honda powered unit features an extended run fuel tank, extra oil cooling and easy handling. Great for continuous duty applications powering our pumps or other hydraulic equipment using the variable speed throttle to control hydraulic outputs.



## **FEATURES**

- Reliable Honda Electric Start Gas Engine with Oil-Alert™ Safety Shutdown
- Roll Cage Frame with Single Point Lifting Eye
- Gear-Type Hydraulic Pump
- Spin-On Return Filter W/ Indicator
- Variable Speed Throttle Controls Hydraulic Output
- Hydraulic Oil Cooler
- Tank Top Filler/ Strainer
- HTMA Quick Disconnect Couplings

- System Relief Valve
- Made in USA
- Liquid Filled Pressure Gauge
- Fluid Level/ Temperature Gauge
- Wheel Kit

#### **OPTIONS**


- Recoil Start (HT13GXR model)
- Other Flow and Pressure Combinations


A0116



167 Stock Street, Nesquehoning, PA 18240 **Phone**: 570-645-3779 **Fax**: 570-645-4061 **Website**: www.hydra-tech.com **E-Mail**: htpump@hydra-tech.com

### **Model HT13GXRE Overall Dimensions**

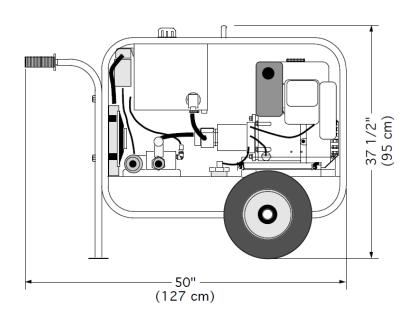

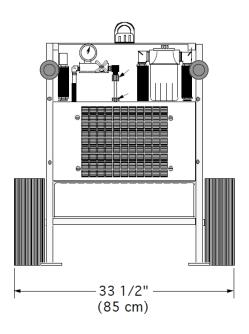

#### **SPECIFICATIONS**

	Honda GX390 Gasoline
	11 @ 3600 RPM
HYDRAULIC OUTPUT:	Variable Max 6 GPM (23 LPM)
OPERATING PRESSURE:	
HOSE PORT SIZE:	1/2" or 3/4" NPT
HYDRAULIC OIL:	SAE 10W or 20W Type AW
	also: Dexron ATF or Biodegradable Oil
	10 Micron (Standard)
OIL RESERVOIR CAPACITY:	8 U.S. Gallons (30 Liters)
FUEL TANK CAPACITY:	15 U.S. Gallons (57 Liters)
FUEL CONSUMPTION:	Approx9 U.S. Gal/Hr (3.4 Liters/Hr)
DIMENSIONS: H 37 1/2" (95	cm) x W 33 1/2" (85 cm) x L 50" (127 cm)
WEIGHT (Dry):	355 lbs. (161 kg)

<sup>\*</sup> For Flows and Pressures Other Than Standard, Consult Factory

Since we are constantly working to improve our products, specifications are subject to change without notice.



167 Stock Street, Nesquehoning, PA 18240 Phone: 570-645-3779 Fax: 570-645-4061 Website: <a href="mailto:www.hydra-tech.com">www.hydra-tech.com</a>
E-Mail: <a href="mailto:httpump@hydra-tech.com">httpump@hydra-tech.com</a>