

## PORTABLE HYDRAULIC POWER UNIT

### MODEL HT13GE/G

This Honda powered gas power pack is ideal for driving our 3" trash pump and even our 6" high-volume propeller pump. It also can provide hydraulic power to run many other hydraulic tools now available using the variable speed throttle to control hydraulic output.



## FEATURES


- Reliable Honda Electric Start Gas Engine with Oil-Alert™ Safety Shutdown
- Roll Cage Frame with Single Point Lifting Eye
- Gear-Type Hydraulic Pump
- Spin-On Return Filter W/ Indicator
- Variable Speed Throttle Controls Hydraulic Outputs
- Hydraulic Oil Cooler
- Tank Top Filler/ Strainer
- HTMA Quick - Disconnect Couplings
- System Relief Valve
- Made in USA
- Liquid Filled Pressure Gauge
- Fluid Level/ Temperature Gauge

### OPTIONS

- Wheel Kit
- Recoil (HT13G model)
- Other Flow and Pressure Combinations

A0116

## Model HT13GE/G Overall Dimensions

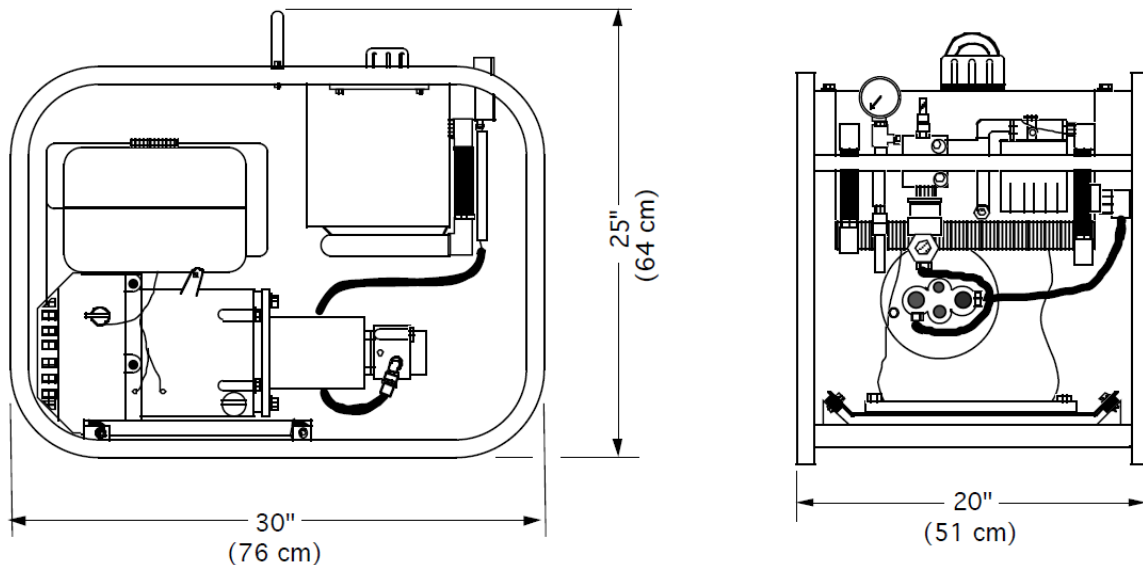

## SPECIFICATIONS

ENGINE:..... Honda GX390 Gasoline  
 HORSE POWER:..... 11.5 @ 3600 RPM  
 HYDRAULIC OUTPUT:..... Variable Max 6 GPM (23 LPM)  
 OPERATING PRESSURE:..... Maximum 2100 PSI (143 Bar)  
 HOSE PORT SIZE:..... 1/2" NPT  
 HYDRAULIC OIL:..... SAE 10W or 20W Type AW  
                                     also: Dexron ATF or Biodegradable oil  
 OIL FILTRATION:..... 10 Micron (Standard)  
 OIL RESERVOIR CAPACITY:..... 4 U.S. Gallons (15.1 Liters)  
 FUEL TANK CAPACITY:..... 1.5 U.S. Gallons (6.1 Liters)  
 FUEL CONSUMPTION:..... Approx. .9 U.S. Gal/Hr (3.4 Liters/Hr)  
 DIMENSIONS:..... H 25" (63.5 cm) x W 20" (51 cm) x L 30" (76 cm)  
 w/ Wheel Kit H: 28 3/4" (73 cm) x W 30 1/2" (78 cm) x L 41" (104 cm)  
 WEIGHT:..... 234 lbs (106 kg)

\* For Flows and Pressures Other Than Standard, Consult Factory

Since we are constantly working to improve our products, specifications are subject to change without notice.



167 Stock Street, Nesquehoning, PA 18240 Phone: 570-645-3779 Fax: 570-645-4061

Website: [www.hydra-tech.com](http://www.hydra-tech.com)

E-Mail: [htpump@hydra-tech.com](mailto:htpump@hydra-tech.com)