


PORTABLE HYDRAULIC POWER

UNIT MODEL HT35DVY Skid

This power unit is powered by a T4F Yanmar diesel engine and is designed to drive several of our pump models including the S4SCR. A large, built-in fuel tank allows this unit to run up to 15 hours between refills. Other equipment that require flows to 20 GPM may also operate from this power unit.

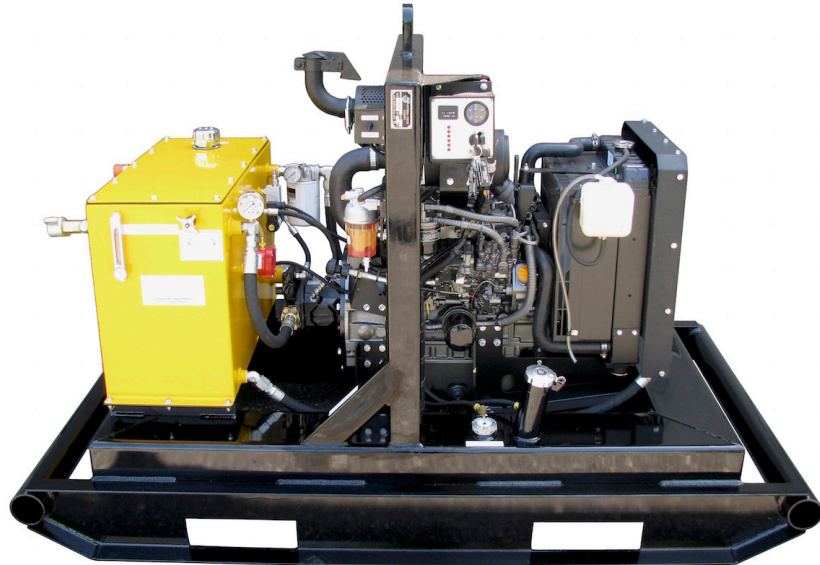

FEATURES


- Skid Frame w/ forklots
- Single Point Lifting Bracket
- Automatic Engine Safety Shutdown
- Variable Volume Piston Hydraulic Pump
- Hydraulic Oil Cooler
- Variable Speed Control
- Spin-On Return Filter w/ dirt indicator
- Tank Top Filler/ Strainer
- System Relief Valve
- Liquid Filled Pressure Gauge
- Fluid Level/ Temperature Gauge

OPTIONS

- Pressure Control Valve
- Trailer mounted
- Multiple Hydraulic Circuits
- Other Flow and Pressure Combinations

A0116

Model HT35DVY Skid Overall Dimensions

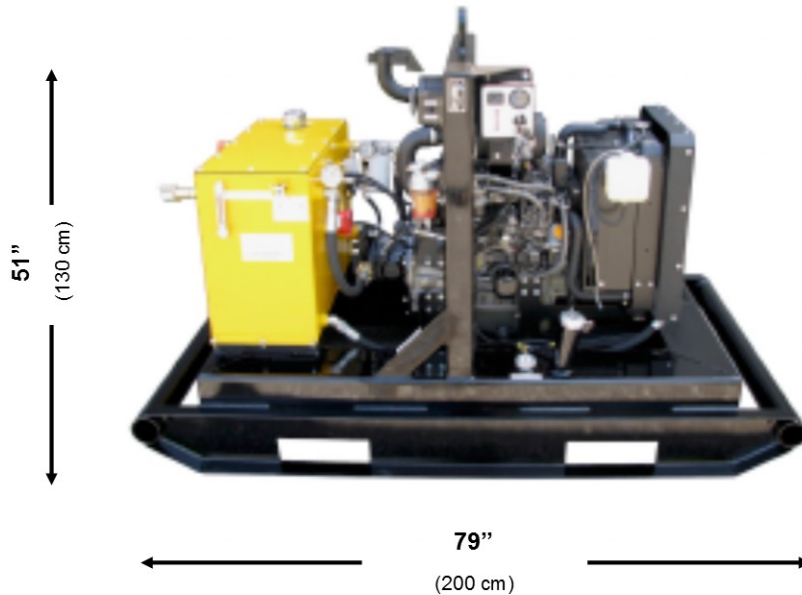

SPECIFICATIONS

ENGINE:..... Yanmar 3TNV88C-DYEM Liquid Cooled Diesel (T4F)
POWER:..... 35 HP(26 KW) @ 3000 RPM
HYDRAULIC OUTPUT*:..... Variable, Max. 20 GPM (76 LPM)
OPERATING PRESSURE*:..... Maximum 2500 PSI (172 Bar)
HOSE PORT SIZE:..... 3/4" NPT
HYDRAULIC OIL:..... SAE 10W or 20W (ISO 32 or 46) Type AW
..... also: Biodegradable oil (Consult Factory)
OIL FILTRATION:..... 10 Micron (Standard)
OIL RESERVOIR CAPACITY:..... 30 U.S. Gallons (113 Liters)
FUEL TANK CAPACITY:..... 42 U.S. Gallons (159 Liters)
FUEL CONSUMPTION:..... Approx. 2.4 U.S. Gal/Hr (9 Liters/Hr)
DIMENSIONS:..... H 51" (130 cm) x W 58" (147 cm) x L 79" (200 cm)
WEIGHT (Dry):..... 1520 lbs. (691 kg)

* For Flows and Pressures Other Than Standard, Consult Factory

Since we are constantly working to improve our products, specifications are subject to change without notice.



167 Stock Street, Nesquehoning, PA 18240 Phone: 570-645-3779 Fax: 570-645-4061

Website: www.hydra-tech.com

E-Mail: htpump@hydra-tech.com